
8T8R, 8 x 40 W

3400 ~ 3600 MHz / 3600 ~ 3800 MHz

Features

- High Output Power : 320 W Total.
- Light Weight : Less than 23 kg with Finger Guard.
- Easy Installation : Single Point Clamping.
- AISG 3.0 Support.

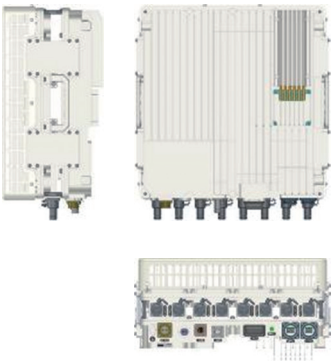

Technical Specification

Frequency Range	3400 ~ 3600 MHz	3600 ~ 3800 MHz
IBW / OBW (Occupied BW)	100 MHz/100 MHz	
RF Output Power	40 W per path	
Channel Bandwidth	NR 100 MHz	
Power Supply	- 8 VDC, nominal (- 37 to - 57 VDC)	
Fronthaul Interface	CPRI, eCPRI	
AISG	AISG 2.0 and AISG 3.0	
Spurious Emission	3 GPP	
Operating Temperature	- 40℃ ~ + 55℃	

Mechanical Specification

Dimension (W × D × H)	400 x 400 x 220 mm
Weight	Less than 23 kg (Including Finger Guard)
IP Grade	IP 65
Cooling Method	Natural Convection
RF Output Connector	4.3 - 10